

PURSUIT OF DETAILS IS MORE INTIMATE

No risk of leakage



High throughput
400L/H



Remove bacteria
More assured



Tankless design
save space



Easy installation
Peace of mind



Remove residual
chlorine

HIGH DENSITY ACTIVATED CARBON

Natural materials with strong adsorption capacity


Efficiently adsorbs residual chlorine in water, chemical pesticides, odors and odors, and filters fine impurities



PREFERRED PP FILTER ELEMENT

Filtration accuracy 5um rough filtration of raw water

Filters solid impurities such as sediment, impurities, rust, suspended solids in water

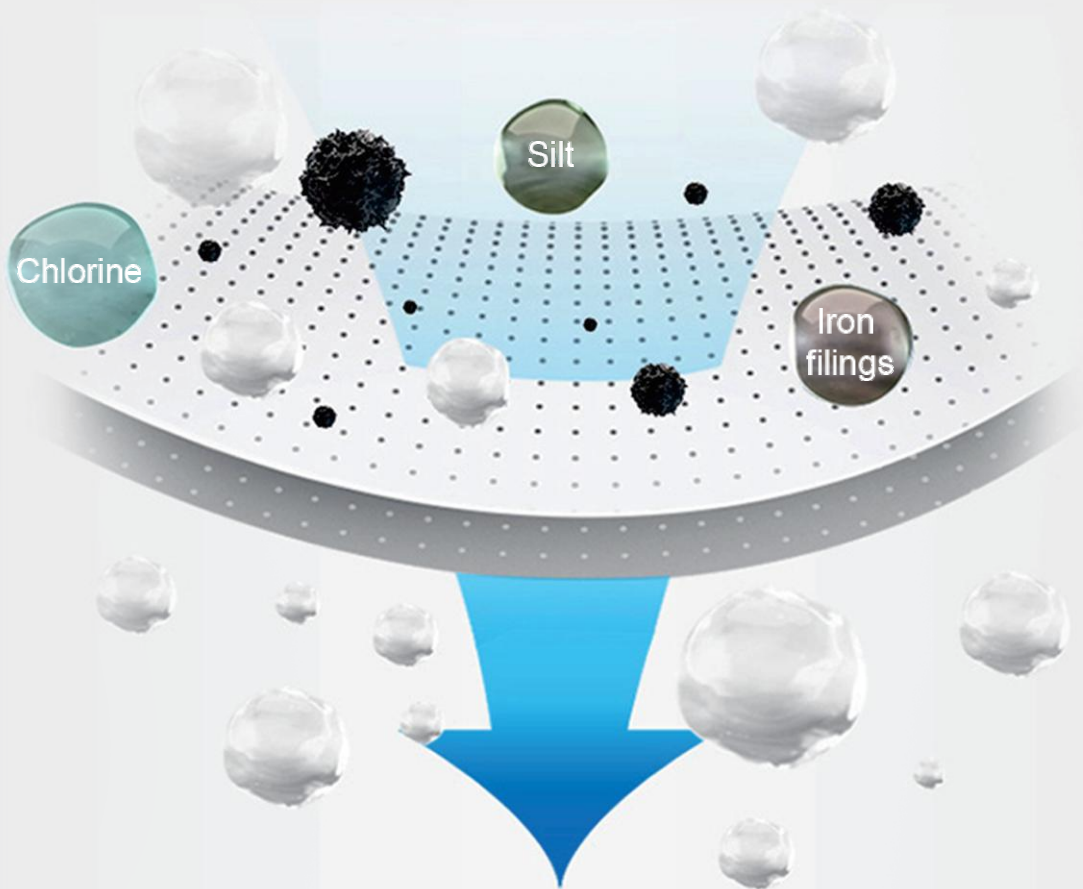

UF ULTRAFILTRATION MEMBRANE FILTER

Filter out harmful substances, retain beneficial minerals



PRODUCT PARAMETERS



Product Model: Q1

Pure water flow:150L/H

working pressure:0.1-0.4Mpa

Filtration accuracy:0.01um

Dimensions(mm) :360*110*385mm

Operating temperature:5-38 °C